




MAGSAFE POWER HUB

USB-C POWER DELIVERY AND USB-A QC 3.0

MODEL: PWCUQC014

1.Illustration

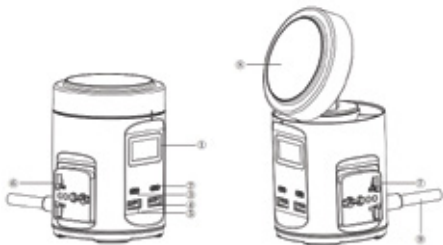

- 1, Digital Display
- 2, Type-C2 Output port
- 3, Type-C1 Output port
- 4, USB-A2 Output port

- 5, USB-A1 Output port
- 6, AC Outlet 1
- 7, AC Outlet 2
- 8, Wireless charging suction

2,Product specifications

Model: PWCUQCC014

AC: 2200W; Rated voltage: 100-240V-50/60Hz Rated current: 10A Max

Input: 100-240V-50/60Hz 1.5A Max

Wireless Output: 15W Max; Rated current: 10A Max

C1/C2 Output: PD65W (DC 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/3.25A)

A1/A2 Output: 22.5W (DC 5V/3A,9V/2A,12V/1.5A SCP: 22.5W)

C1+C2 Output: 45W+20W=65W

C1+A1 Output: DC 5V/3A 15W Max

C1+A2 Output: 45W+22.5W=67.5W

C2+A2 Output: DC 5V/3A 15W Max

C1+A1+C2 Output: 15W+20W=35W

C1+C2+A2 Output: 45W+15W=60W

C1+A1+A2 Output: 15W+22.5W=37.5W

C1+C2+A1+A2 Output: 15W+15W=30W

Total power: C1+C2+A1+A2+Wireless output: 65W Max

Dimension: 103.5*75MM

3,Usage

Charge your device

When connected to the power supply, the display screen will light up to display the current power and wireless charging symbol. If there is no wireless charging device connected for charging, the wireless charging symbol will display for 2 seconds and then turn off. At this time, the screen will display the current standby power. If there is no load for about 30 seconds, the screen will turn off and enter standby mode.

Working mode: When connecting the charging cable and devices, the screen will display the current output port identification and output power. If entering fast charging mode, a green lightning

symbol will remain on the screen. If charging normally, this symbol will not be displayed. If connecting to a wireless charging device, a green wireless charging symbol will remain on.

This product has 4 output ports and 1 wireless charging suction cup. In addition, it also has 2 AC outlets, which you can connect to for multiple devices to charge simultaneously.

4,Features

High power AC 65W power strip with Multi ports

High compatibility fits for different Electronic equipments

Intelligent protect program to avoid overcharging / discharging, short circuit, etc

Compact and Portable design, easy operation

5,Warnings

Read all the instructions before using the product.

Do not subject the product to direct sun and high temperatures.

Do not place on a surface that is wet from water or cleaning solvents.

Do not puncture, throw, drop, bend or modify. Stop using the product when it generates unusual smell, heating, distortion of any other abnormalities.

Please keep it out of the reach of children.

CORRECT DISPOSAL FOR THIS PRODUCT

This marking indicates that this product should not be disposed of with other household wastes throughout the EU. To prevent possible harm to the environment or human health from uncontrolled waste disposal, recycle it responsibly to promote the sustainable reuse of material resources. To return your used device, please use the return and collection systems or contact the retailer where the product was purchased. They can take this product for environmentally safe recycling.

